



DOWSIL™ 995 Silicone Structural Sealant

High ultimate tensile strength sealant ideally suited for structural bonding and protective glazing applications

Features & Benefits

- Odorless, non-corrosive cure system
- Cures to form an extremely tough elastomeric rubber ensuring a durable, flexible, watertight bond
- Excellent weatherability and high resistance to ultraviolet radiation, heat and humidity, ozone and temperature extremes
- Excellent mechanical properties
- Successfully tested for use in protective glazing applications
- Excellent unprimed adhesion to wide range of substrates including coated, enameled, and reflective glasses; anodized and polyester coated or painted aluminum profiles including most fluoropolymer-based paints such as Kynar
- Meets global standards for structural glazing (American, Chinese, European)

Composition

- One-part, neutral-cure elastomeric sealant

Applications

- Silicone structural glazing and protective glazing applications

Typical Properties

Specification Writers: These values are not intended for use in preparing specifications.

Test ¹	Property	Unit	Result
	As Supplied		
	Color		Black, gray, white
ASTM C679	Tack-Free Time, 50% RH	minutes	65
	Curing Time 25°C (77°F) at 50% RH	days	7–14
	Full Adhesion	days	14–21
ASTM C639	Flow, Sag, or Slump	inches	0.1
	Working Time	minutes	10–20
	Specific Gravity		1.339
	Volatile Organic Content ² (VOC)	g/L	30

1. ASTM: American Society for Testing and Materials.
2. Based on South Coast Air Quality Management District of California. Maximum VOC is listed both inclusive and exclusive of water and exempt compounds

Typical Properties (Cont.)

Test	Property	Unit	Result
As Cured – After 7 Days at 25°C (77°F), 50% RH			
ASTM 2240	Durometer Hardness, Shore A	points	40
ASTM D412	Ultimate Tensile Strength	psi (MPa)	350 (2.41)
	Ultimate Elongation	%	525
ASTM D624	Tear Strength, Die B	ppi	49
ASTM C794	Peel Strength	ppi	40
As Cured – After 21 Days at 25°C (77°F), 50% RH			
ASTM C1135	Tensile at 25% Elongation	psi (MPa)	43 (0.30)
ASTM C1135	Tensile at 50% Elongation	psi (MPa)	65 (0.43)
	Ultimate Tensile Strength	psi (MPa)	170 (1.17)
ASTM C719	Joint Movement Capability	%	±50


Description

DOWSIL™ 995 Silicone Structural Sealant is a one-part neutral-curing silicone sealant designed specifically for structural bonding applications of glass and metal in factory or field situations.

The rate of surface cure and cure-in-depth of most one-part RTV silicone sealants is affected by the temperature and humidity of the environment. However, an environment of high temperatures in combination with high humidity may slow the surface cure rate of DOWSIL™ 995 Silicone Structural Sealant.

Colors

This product is available in black, gray, and white.

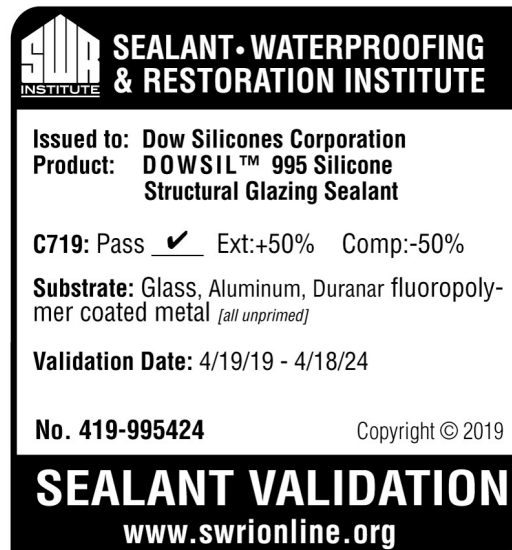

Approvals/ Specifications

DOWSIL™ 995 Silicone Structural Sealant has been internally tested and is designed to meet or exceed the test requirements of:

- Federal Specification TT-S- 001543A (COM-NBS) Class A for silicone building sealant
- Federal Specification TT-S-00230C (COM-NBS) Class A for one-component building sealant
- ASTM Specification C-920 Type S, Grade NS, Class50, Use NT, G and A
- ASTM C1184 Standard Specification for Structural Silicone Sealant
- Chinese specification GB 16776 for structural glazing
- SNJF VEC



SGBP 2019-2727

DOWSIL™ 995 Silicone Structural Sealant exhibits a high level of physical properties and adhesive performance, which are retained even after aging as detailed by EOTA ETAG 002 and prEN 13022 European Standards.

How to Use

Complete design and installation guidelines are contained in the Dow Americas Technical Manual, Form No. 62-1112. Specific advice is available from your local Dow Sales Application Engineer.

Preparation

Clean all joints and glazing pockets, removing all foreign matter and contaminants such as grease, oil, dust, water, frost, surface dirt, old sealants, or glazing compounds and protective coatings.

Application Method

Install back-up material or joint filler, setting blocks, spacer shims, and tapes. Mask areas adjacent to joints to ensure neat sealant lines. Primer is generally not required on non-porous surfaces, but may be necessary for optimal sealing of certain porous surfaces. A test placement is always recommended.

Apply DOWSIL™ 995 Silicone Structural Sealant in a continuous operation using a positive pressure. (The sealant can be applied using many types of air-operated guns and most types of bulk dispensing equipment.) Before a skin forms (typically within 10 minutes), tool the sealant with light pressure to spread the sealant against the backing material and joint surfaces. Remove masking tape as soon as the bead is tooled.

**Handling
Precautions**

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT DOW.COM, OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

**Usable Life and
Storage**

When stored at or below 30°C (86°F) in the original unopened containers, this product has a usable life of 18 months from the date of manufacture.

**Packaging
Information**

This product is available in 10.3 ounce cartridge, a 20 ounce sausage pack, 2 gallon pail, 4.5 gallon pail, and a 228.1 kg drum, depending on location of purchase.

Limitations

DOWSIL™ 995 Silicone Structural Sealant should not be applied:

- To building materials that bleed oils, plasticizers, or solvents– materials such as impregnated wood, oil-based caulks, green or partially vulcanized rubber gaskets or tapes
- In totally confined spaces as the sealant requires atmospheric moisture for cure
- When surface temperatures exceed 60°C (140°F)
- Where painting of the sealant is required, as the paint film may crack and peel
- To surfaces in contact with food– this sealant does not comply with Federal Food and Drug Administration food-additive regulations
- In below-grade applications
- For use as an interior penetration fire stop sealing system
- In horizontal floor joints where abrasion and physical abuse are likely to be encountered
- To frost-laden or damp surfaces
- For continuous immersion in water

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

Dow shall not be held liable for any possible claims arising from structural glazing use of this product for projects that have not been specifically approved by Dow.

**Health and
Environmental
Information**

To support customers in their product safety needs, Dow has an extensive Product Stewardship organization and a team of product safety and regulatory compliance specialists available in each area.

For further information, please see our website, dow.com or consult your local Dow representative.

**Disposal
Considerations**

Dispose in accordance with all local, state (provincial) and federal regulations. Empty containers may contain hazardous residues. This material and its container must be disposed in a safe and legal manner.

It is the user's responsibility to verify that treatment and disposal procedures comply with local, state (provincial) and federal regulations. Contact your Dow Technical Representative for more information.

Product Stewardship

Dow has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with Dow products - from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

Customer Notice

Dow strongly encourages its customers to review both their manufacturing processes and their applications of Dow products from the standpoint of human health and environmental quality to ensure that Dow products are not used in ways for which they are not intended or tested. Dow personnel are available to answer your questions and to provide reasonable technical support. Dow product literature, including safety data sheets, should be consulted prior to use of Dow products. Current safety data sheets are available from Dow.

dow.com

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

